

中負荷頂針

MEDIUM-LOAD TYPE

RPM: 5000 - 6500 MT/MK. 4, 5

NC

型 LIVE CENTER


迷宫式迴轉頂針密封防水結構
專利號碼 M553237
MAZE TYPE, WATERPROOF DESIGNED
WITHOUT SEAL, PAT. NO. M553237



A-TYPE





B-TYPE



NCD

型 LIVE CENTER




NC

型 LIVE CENTER

1. 前端使用雙列斜角滾珠軸承及止推軸承，及滾針軸承之組合。
2. 此頂針適用於CNC車床，具高速及中負荷使用，具防水性。
3. 車床尾座調整壓力建議5~8公斤。

※ NC-B型:適合小工件之加工切削。

1. Front end is fitted with angular contact ball bearing, thrust bearing and needle bearing.
 2. These centers are suitable for CNC lathes at high-speed and medium-load. Waterproof design, the waterproof is maze type.
 3. The tailstock pressure of lathe adjusts to five to eight kilograms (for reference)
- ※ NC-B type: Long nose live centers are suitable for small workpieces.

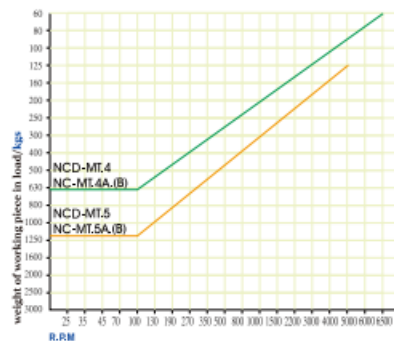

單位/Unit:mm

ORDER NO.	MORE TAPER MT/MK	A	B	C	D	D1	d	L	Co精度 Accuracy	Max R.P.M	θ	G.W. weight kgs	包裝尺寸 L x W x H
08200004	NC-MT.4A	44	55	108	53	30	-	207	0.003	6500R.P.M	60°	1.62 kgs	240 x 80 x 85
08200005	NC-MT.5A	48	61	136	68	35	-	245	0.003	5000R.P.M	60°	3.26 kgs	300 x 90 x 90
08200014	NC-MT.4B	52	55	108	53	30	12	215	0.003	6500R.P.M	60°	1.63 kgs	240 x 80 x 85
08200015	NC-MT.5B	58	61	136	68	35	14	255	0.003	5000R.P.M	60°	3.28 kgs	300 x 90 x 90
08200024	NCD-MT.4	33	55	108	53	30	-	196	0.005	6500R.P.M	30°	2.28 kgs	235 x 130 x 86
08200025	NCD-MT.5	37	61	136	68	35	-	234	0.005	5000R.P.M	30°	4.12 kgs	280 x 150 x 100